

Blueprint


ULTRASUEDE BELT 1

SUPPLIES:

1/8 yard of 60-inch-wide fabric
Hole punch

INSTRUCTIONS:

1. Enlarge your choice of these patterns to 200 percent and then to 150 percent.
2. Fold fabric in half; place widest part of pattern at the fold. Pin in place with quilting pins, which are long and strong, ideal for heavy fabric like this.
3. Cut out the belt. With the hole punch, perforate the edges, positioning holes 1/2 inch apart and 1/2 inch in from the edge.
4. Wrap belt around waist, and tie in back.

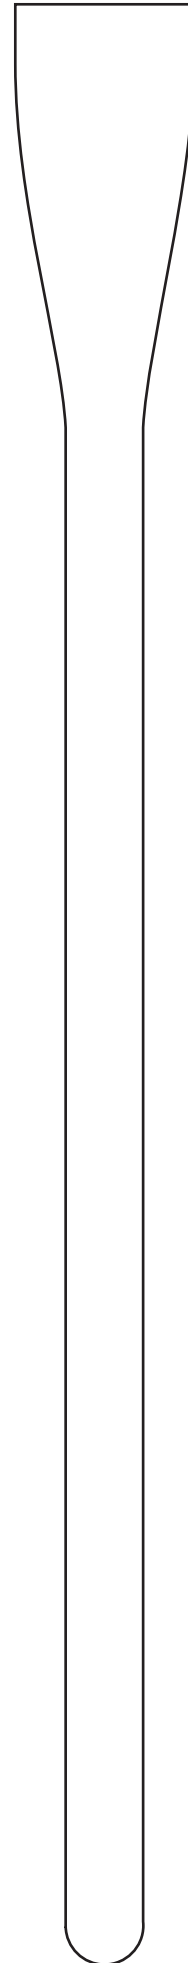

Blueprint


ULTRASUEDE BELT 2

SUPPLIES:

1/8 yard of 60-inch-wide fabric
Hole punch

INSTRUCTIONS:

1. Enlarge your choice of these patterns to 200 percent and then to 150 percent.
2. Fold fabric in half; place widest part of pattern at the fold. Pin in place with quilting pins, which are long and strong, ideal for heavy fabric like this.
3. Cut out the belt. With the hole punch, perforate the edges, positioning holes 1/2 inch apart and 1/2 inch in from the edge.
4. Wrap belt around waist, and tie in back.

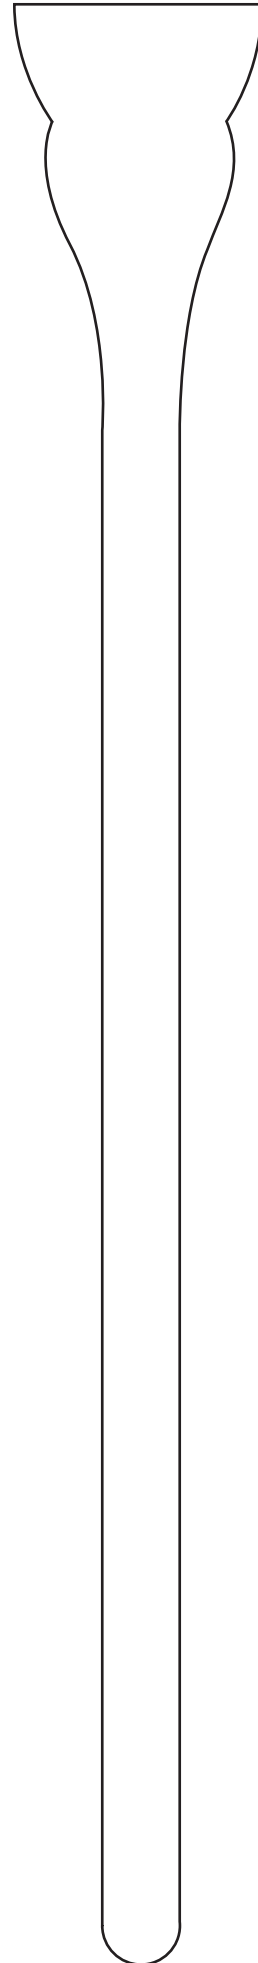

Blueprint

ULTRASUEDE BELT 3

SUPPLIES:

1/8 yard of 60-inch-wide fabric
Hole punch

INSTRUCTIONS:

1. Enlarge your choice of these patterns to 200 percent and then to 150 percent.
2. Fold fabric in half; place widest part of pattern at the fold. Pin in place with quilting pins, which are long and strong, ideal for heavy fabric like this.
3. Cut out the belt. With the hole punch, perforate the edges, positioning holes 1/2 inch apart and 1/2 inch in from the edge.
4. Wrap belt around waist, and tie in back.

